


Port Area Layout

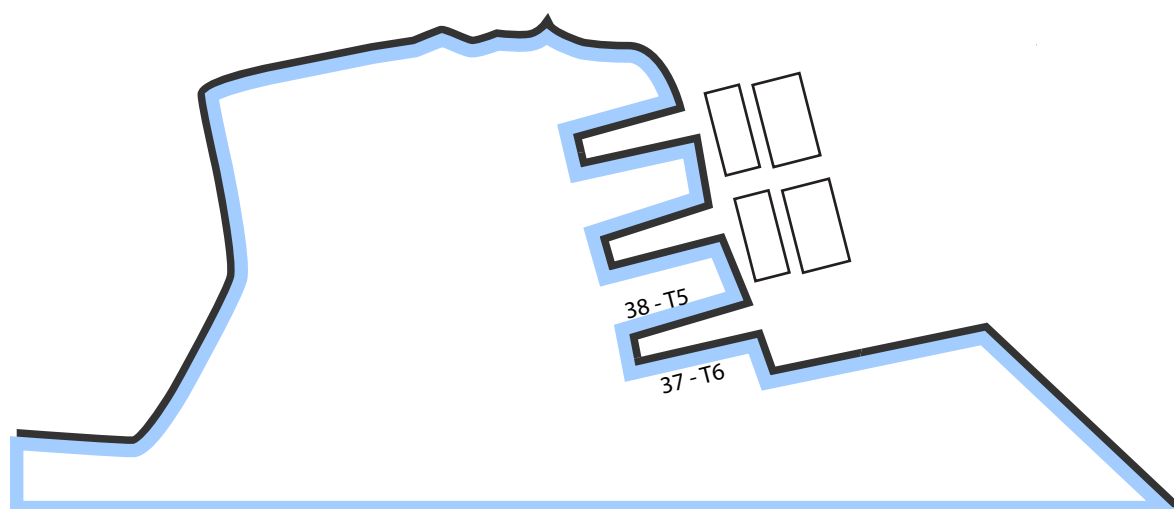

General information

OPERATION TYPE

Direct discharge to trucks and/or to shore Tanks (restricted)

WATER DENSITY

1025 Salt water

CARGO RATE

2000 / 2500

CARGO HANDLED

Liquids, Chemical products, Vegetable oils

VESSEL RESOURCES

Connection

SHORE RESOURCE

Hoses connection 4, 6 and 8 inches

PORT OPERATORS

Terquinca

DOCKS TO WEIGHT SCALE

N/A

Services

FRESH WATER

Available ex trucks

UNDERWATER INSPECTION

Available - Compulsory

OTHER INSPECTIONS

Draff survey, bunker survey, hull condition, on & off hire bunker survey, ballast analyze, tally, security guard

SHIP'S PROVISION

Available - ship's chandlers must be hire

REPAIRS AND STORE

Minors

BUNKERS

Available ex trucks

GARBAGE

Available - Compulsory

• 3 tugboats used for vessels with LOA starting 155 mts and 8.50 meters draft, night berthing maneuver will be subject to the lighting and fenders conditions (Dock N° 37)

• 3 tugboats used for vessels with LOA starting 160mts or 9.50 mts draft, night berthing maneuver will be subject to the lighting and fenders conditions (Docks N° 38)

Facilities	Berth N°	Berth Length	Max LOA	Max Draft	Max Beam
Liquid / Chemical	Dock N° 37	175	160	9	No Restrictions
General / Granel Cargo	Dock N° 38	180	170	9.8	No Restrictions

